

Ducted Fire Rated Axial Inline Fan

KCAF-F300



■ Properties:

- Aero foil Aluminum sectioned blades, adjustable for maximum efficiency
- 3-phase motors
- Suitable for high air flow and pressurized areas
- Highly efficient IE2 motor with Class-H insulation and IP55 protection
- Certified of F300 temperature resistance Class according to EN-12101-3
- It is suitable for frequency inverters
- Optionally, 2-speed motor


■ Material:

- Axial inline duct fans are manufactured from high quality Hot-Dip galvanized sheet steel
- Optional: Electrostatic Painted Casing.

■ Optional Accessories:

- | | |
|--------------------------|----------------------------------|
| - Speed Controller (VFD) | - Anti-Vibration Springs |
| - Backdraft Damper | - Counter Flanges (Inlet/Outlet) |
| - Silencer | - Wire Guard |
| - 60 Hz | |

KCAF-F300

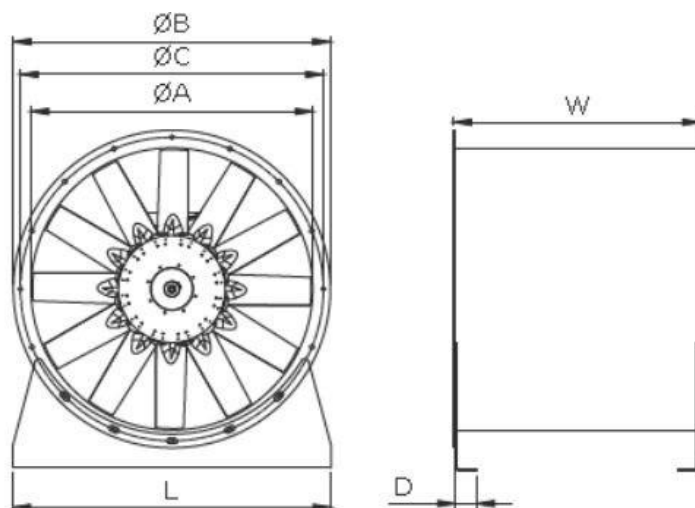

MODEL	A	B	C	W	L	D
KCAF-Ø400	400	480	450	500	496	50
KCAF-Ø450	450	530	500	500	560	50
KCAF-Ø500	500	600	560	500	600	50
KCAF-Ø560	560	660	620	500	662	50
KCAF-Ø630	630	730	690	700	727	50
KCAF-Ø710	710	810	770	700	806	50
KCAF-Ø800	800	900	860	700	903	60
KCAF-Ø900	900	1000	970	800	996	60
KCAF-Ø1000	1000	1100	1070	800	1096	60
KCAF-Ø1120	1120	1220	1190	900	1216	60
KCAF-Ø1250	1250	1370	1320	900	1250	60
Note: All dimensions are written in 'mm'						